

Q.PEAK DUO-G10 SERIES



360 - 380 Wp | 120 Cells
21.2 % Maximum Module Efficiency

MODEL Q.PEAK DUO-G10
Q.PEAK DUO-G10.4



Breaking the 21% efficiency barrier

Q.ANTUM DUO Z technology with zero gap cell layout boosts module efficiency up to 21.2%.



Enduring high performance

Long-term yield security with Anti LeTID Technology, Anti PID Technology¹ and Hot-Spot Protect.



Extreme weather rating

High-tech aluminium alloy frame, certified for high snow (8100 Pa) and wind loads (4000 Pa).



Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.



A reliable investment

Inclusive 12-year product warranty and 25-year linear performance warranty².



The most thorough testing programme in the industry

Qcells is the first solar module manufacturer to pass the most comprehensive quality programme in the industry: The new "Quality Controlled PV" of the independent certification institute TÜV Rheinland.

¹ APT test conditions according to IEC/TS 62804-1:2015, method A (-1500 V, 96 h)
² See data sheet on rear for further information.

The ideal solution for:




Rooftop arrays on residential buildings



Q.PEAK DUO-G10 SERIES

Mechanical Specification

| | |
|--------------|--|
| Format | 1717 mm × 1045 mm × 32 mm (including frame) |
| Weight | 19.9 kg |
| Front Cover | 3.2 mm thermally pre-stressed glass with anti-reflection technology |
| Back Cover | Composite film |
| Frame | Black anodised aluminium |
| Cell | 6 × 20 monocrystalline Q.ANTUM solar half cells |
| Junction box | 53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes |
| Cable | 4 mm ² Solar cable; (+) ≥1150 mm, (-) ≥1150 mm |
| Connector | Stäubli MC4, Hanwha Q CELLS HQC4; IP68 |

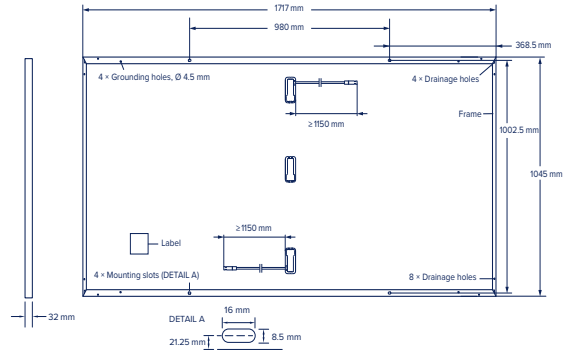


Electrical Characteristics

| POWER CLASS | | | 360 | 365 | 370 | 375 | 380 |
|--|------------------------------------|---------------|-------|-------|-------|-------|-------|
| MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ (POWER TOLERANCE +5W/-0 W) | | | | | | | |
| Minimum | Power at MPP ¹ | P_{MPP} [W] | 360 | 365 | 370 | 375 | 380 |
| | Short Circuit Current ¹ | I_{SC} [A] | 11.24 | 11.27 | 11.31 | 11.34 | 11.37 |
| | Open Circuit Voltage ¹ | V_{OC} [V] | 41.20 | 41.23 | 41.26 | 41.30 | 41.33 |
| | Current at MPP | I_{MPP} [A] | 10.62 | 10.68 | 10.75 | 10.81 | 10.87 |
| | Voltage at MPP | V_{MPP} [V] | 33.89 | 34.16 | 34.43 | 34.69 | 34.95 |
| | Efficiency ¹ | η [%] | ≥20.1 | ≥20.3 | ≥20.6 | ≥20.9 | ≥21.2 |
| MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT ² | | | | | | | |
| Minimum | Power at MPP | P_{MPP} [W] | 270.1 | 273.8 | 277.6 | 281.3 | 285.1 |
| | Short Circuit Current | I_{SC} [A] | 9.06 | 9.08 | 9.11 | 9.14 | 9.16 |
| | Open Circuit Voltage | V_{OC} [V] | 38.85 | 38.88 | 38.91 | 38.95 | 38.98 |
| | Current at MPP | I_{MPP} [A] | 8.34 | 8.40 | 8.46 | 8.51 | 8.57 |
| | Voltage at MPP | V_{MPP} [V] | 32.37 | 32.60 | 32.83 | 33.05 | 33.28 |

¹Measurement tolerances $P_{MPP} \pm 3\%$; I_{SC} ; $V_{OC} \pm 5\%$ at STC: 1000 W/m², 25 ± 2 °C, AM 1.5 according to IEC 60904-3 • ²800 W/m², NMOT, spectrum AM 1.5

Qcells PERFORMANCE WARRANTY

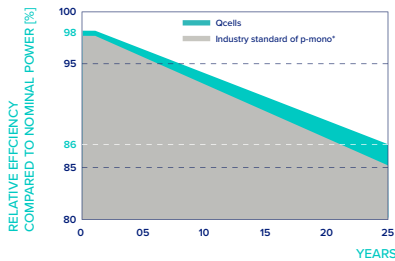


At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.

^{*}Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

PERFORMANCE AT LOW IRRADIANCE

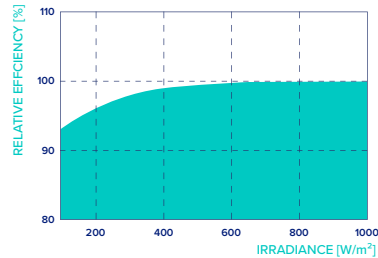

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m²).

TEMPERATURE COEFFICIENTS

| | | | | | |
|--------------------------------------|----------------|-------|--------------------------------------|---------------|--------|
| Temperature Coefficient of I_{SC} | α [%/K] | +0.04 | Temperature Coefficient of V_{OC} | β [%/K] | -0.27 |
| Temperature Coefficient of P_{MPP} | γ [%/K] | -0.34 | Nominal Module Operating Temperature | NMOT [°C] | 43 ± 3 |

Properties for System Design

| | | | | |
|-----------------------------|---------------|-----------|---|-----------------|
| Maximum System Voltage | V_{SYS} [V] | 1000 | PV module classification | Class II |
| Maximum Reverse Current | I_R [A] | 20 | Fire Rating based on ANSI/UL 61730 | C / TYPE 2 |
| Max. Design Load, Push/Pull | [Pa] | 5400/2660 | Permitted Module Temperature on Continuous Duty | -40 °C - +85 °C |
| Max. Test Load, Push/Pull | [Pa] | 8100/4000 | | |

Qualifications and Certificates

Quality Controlled PV - TÜV Rheinland; IEC 61215:2016; IEC 61730:2016. This data sheet complies with DIN EN 50380.



Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product. Hanwha Q CELLS GmbH Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | TEL +49 (0)3494 66 99-23444 | FAX +49 (0)3494 66 99-23000 | EMAIL sales@q-cells.com | WEB www.qcells.com

qcells